




C. TYPICAL DESIGN LAYOUT

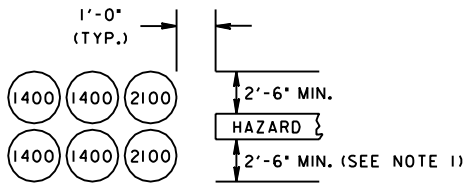


DESIGN SPEED = 25 M.P.H.




DESIGN SPEED = 30 M.P.H.

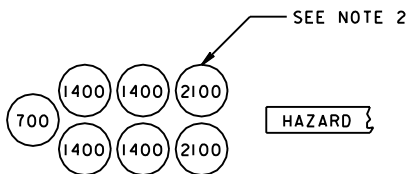


DESIGN SPEED = 35 M.P.H.

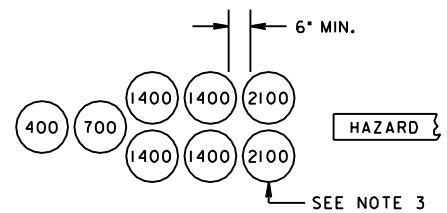


DESIGN SPEED = 40 M.P.H.



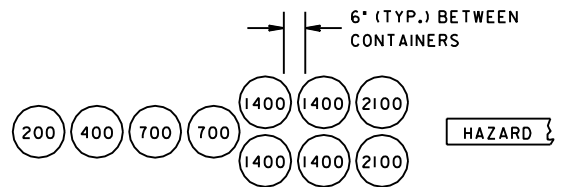

DESIGN SPEED = 45 M.P.H.



DESIGN SPEED = 50 M.P.H.



DESIGN SPEED = 55 M.P.H.

SPECIFICATION 104 & 606	CATEGORY CODE ITEMS	<p align="center"> Maryland Department of Transportation STATE HIGHWAY ADMINISTRATION STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES CRASH CUSHION SAND FILLED PLASTIC BARRELS (TEMPORARY OR PERMANENT) </p>				
APPROVED	 DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT					
	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	STANDARD NO. MD 104.01-71			
	APPROVAL 8-20-03	APPROVAL 9-23-03				
	REVISED	REVISED				
	REVISED	REVISED				